



CX3A


CX SERIES CX3A

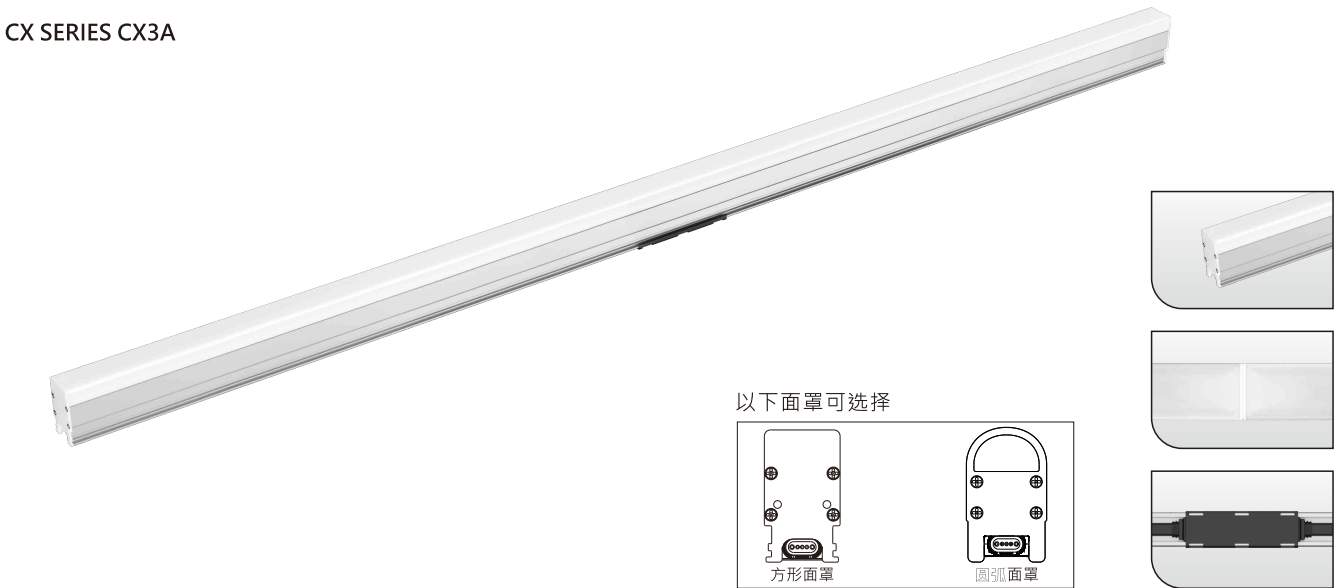

以下面罩可选择




ICON

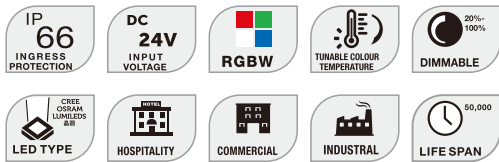

Performance Features

- High-brightness LED soft light pixel linear light with soft illumination and zero glare.
- High-transmittance PC diffuser cover (square and curved options available), featuring even light mixing and seamless connection.
- The interior adopts high-quality polyurethane potting technology, achieving an IP66 protection rating.
- Housing colors can be customized to match curtain walls for better architectural integration.
- Concealed bottom cable outlet delivers a neat overall appearance after installation.
- DC24V power supply ensures stable power feeding, reliable signal transmission and low line loss.
- Up to 10 meters of lights can be connected in series per single power circuit, simplifying wiring work and lowering construction difficulty.


Product Dimension Drawing

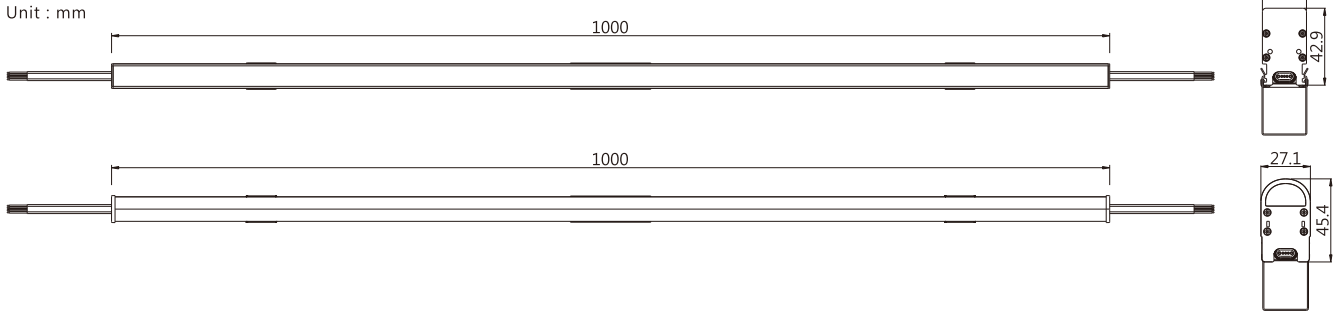

Beam Angle Diagram



Light Distribution / Isolux Curve Diagram

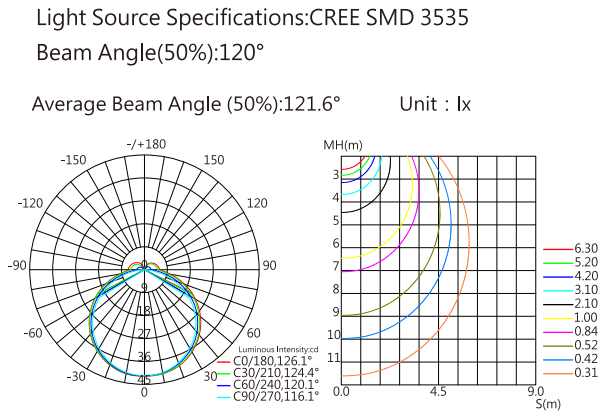

Note: Test data is measured with CX3A-W1000-0048CTA-00.
Test data may vary for different lamp specifications.

Technical Specifications

LED Brand	CREE / OSRAM / LUMILEDS	
Number of LEDs	48	48(4In1)
System Power Consumption(MAX,±10%)	24W(单色)	24W
Luminous Efficacy (lm/W)	37	18
Gray Scale Level	65536	
Beam Angle	≥120°	
Power Supply Type	DC24V	
Operating Environment Range	-40℃~50℃ (Temperature) / 10%~95%RH (Humidity)	
Material (Main Body)	High-strength stretched aluminum with PC cover (square and curved styles optional)	
Connection Cable Type	Signal / Power Cable: Special rubber sheathed cable for outdoor use	
Dimensions (Excluding Bracket)	1000*24.6*42.9(Square Cover)/1000*27.1*45.4(Arc Cover)mm	
Weight	0.9kg	
Number of Pixels	8/4/2/1	
Control Type	DMX512	
Protection Grade	IP 66	
Service Life	≥50000 Hours	
Operating Environment	Outdoor	
Light Source Color	Luminous Flux	
3000K	890 lm	-
RGBW(3000K)	-	430 lm

Installation Diagram

Bracket Quantity : 2PCS

