


INSTALLATION

LK Series LED Wall Washer

■ Please read carefully before use

- 1.The rated operating voltage of this luminaire model is DC 24V.
- 2.The main power cable running from the power supply to each luminaire shall be 4mm² (or 6mm²) in cross-section with a maximum length of 15 m (or 20 m). All luminaires shall be wired in parallel on the main power cable.
- 3.CAT5 cable shall be adopted for signal transmission. The distance between the controller and the first luminaire shall not exceed 100 meters, and the total distance from the controller to the last luminaire shall not exceed 200 meters.
- 4.All wiring construction shall conform to national installation codes and standards. All cable joints shall be firmly connected and equipped with waterproof treatment.
- 5.Please refer to our official product catalog for specific model information.
- 6.Do not disassemble the luminaire without permission. StrongLED Lighting Systems (Suzhou) Co., Ltd. shall not bear any liability for losses or damages caused by unauthorized disassembly.
- 7.For further detailed documents, please visit our official website: www.strongled.com

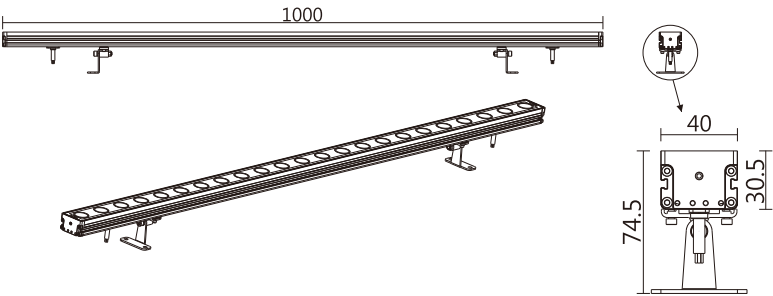


■ Technical Specifications

Product Name	Size(mm)	Voltage	Max. Power	Weight
LW-1105	1000*40*30.5	DC24V	Refer to product label	Max≤1.5kg

Installation Procedures for Rotating Bracket


1.

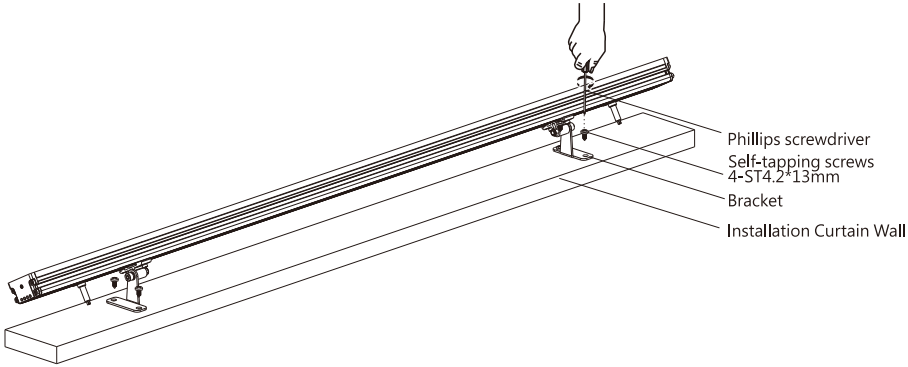

Phillips screwdriver
Self-tapping screws
4-ST4.2*13mm
Bracket
Installation Curtain Wall

Secure the luminaire bracket to the mounting curtain-wall with screws.


2.

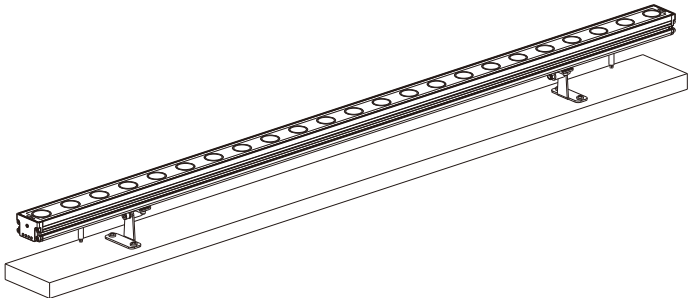


Rotate the luminaire to a proper angle to finish installation.

3.


Low-profile Rotating Bracket



Standard Rotating Bracket




Height-extended Rotating Bracket



Rotatable range: +90° ~-90°


■ Waterproof Connector (Unit: mm) (Optional)

5-core Round-Cable Waterproof Male Connector ($L1 \leq 1000$)

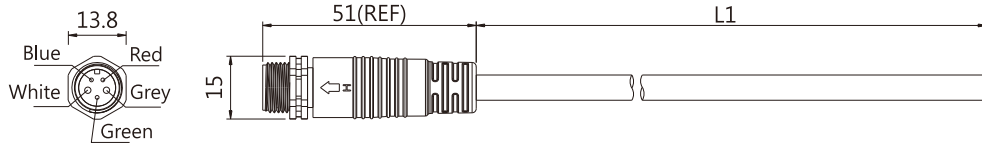

Color Definition of DMX Signal Connection Wire	Red	DMX+	3*24AWG(0.20mm ²)
	Blue	DMX-	
	Green	CFG (IN/OUT)	
	Grey	V+	2*18AWG(0.81mm ²)
	White	V-	


5-core round-cable waterproof female connector ($L2 \leq 1000$ mm)

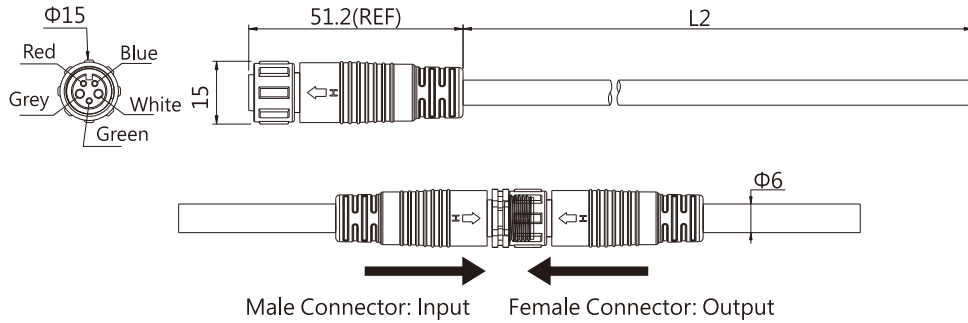

2-core round-cable power waterproof connector




Color Definition of Power Connection Wire		
Red	+	2*1mm ²
Black	-	

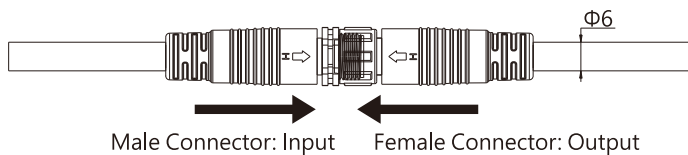


■ System Wiring Diagram

Single-color Constant-On

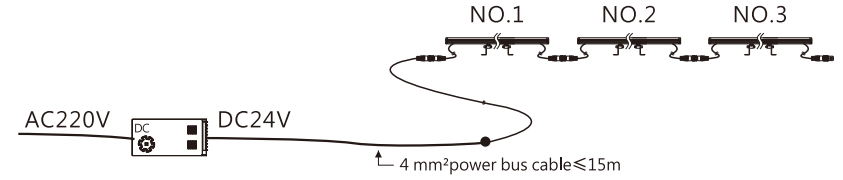

Note: Single-color steady-on mode. Cable exits from one-side end-cap of each luminaire with length ≤ 100 mm. Maximum 3 luminaires (32W per unit) can be daisy-chained on one single power-supply circuit. It is recommended that the total power of luminaires on each circuit does not exceed 80% of the maximum rated power of the power supply.

DMX Control

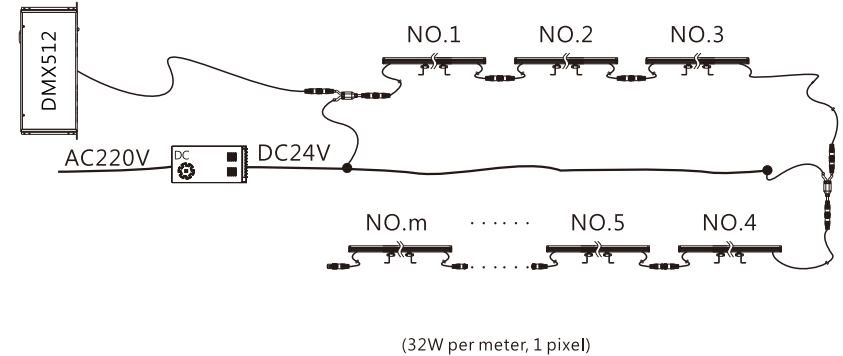

Note: Power-supply circuit: Adopt 4 mm² main power cable. The cable length from power supply to the first luminaire shall not exceed 15 m. Each luminaire has one pixel point. The outgoing-cable from single-side end-cap is ≤ 100 mm. A maximum of 3 luminaires can be connected in-series per string, with a total load of 15 luminaires. Signal circuit: CAT5 cable is used for signal wiring. The distance from controller to the last luminaire cannot exceed 100 m. A signal amplifier shall be added if the length exceeds 100 m. Under standard DMX512 protocol, no more than 170 pixels (3-channel per luminaire) can be wired on one signal circuit.

⚠ Do not perform any link operation on the lamp when it is live, as this will completely damage the lamp

STRONGLIGHTING SYSTEM GROUP
StrongLED Lighting Systems (Cayman) Co., Ltd.
NO. 2888, Linhu Avenue, Foho Economic Development Zone,
www.strongled.com
TEL: +86-512-82868008 FAX: +86-512-82868001